




(519) 773-7865 • stolform@gmail.com

Board & Batten

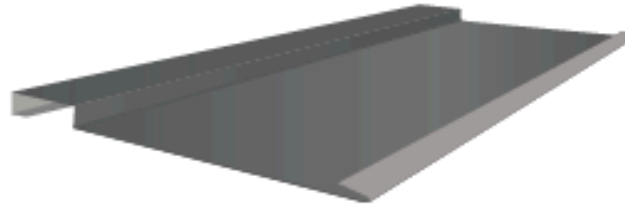

Specifications	Installation
----------------	--------------

Wall Coverage: 9.45"
 Fasteners: Hidden
 Panel Length: Up to 16'-0"
 (Minimum Length 48")

- Recommended to be installed over solid substrate - plywood or OSB
- 1" screws recommended, spaced 8" - 12" apart
- Do not screw directly tight, leave space for steel to expand and contract with the weather.

24 Gauge - Available in 4 Texture colors and 3 Wood Grain Patterns	
--	--



Graphite Grey Textured QC9821



Cedar 18-0248



Ebony Black Textured QC9822



Walnut 18-0290



Deep Grey Textured QC9999



Blackened Wood 18-0249



Sepia Brown Textured QC9798



Bright White 88-0186

The colors shown on this card are for information purposes only and may vary from the actual color.




Board & Batten



Vertical Hidden Fastener Steel Cladding Panel

Get a longer lifespan and more design possibilities with our steel upgrade on the popular Board & Batten cladding panel. Most commonly used for Residential and light commercial use, the hidden fastener design provides a timeless traditional look that is virtually maintenance free.

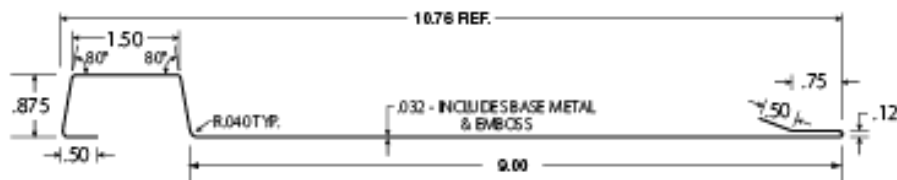

Oil canning is a naturally occurring phenomenon on the flat portion of all sheet steel. This does not affect the performance of the panel. Oil canning is not a valid reason for rejection on these products.